



FULL HEIGHT TURNSTILE

GA3-2-3

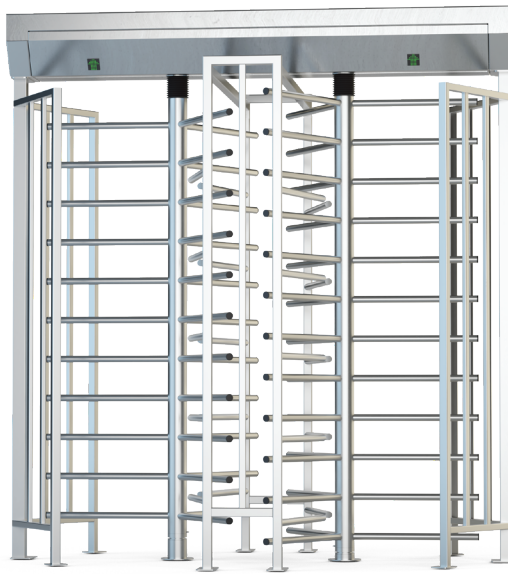

COMFORT OF PASSAGE

FIRSTLY

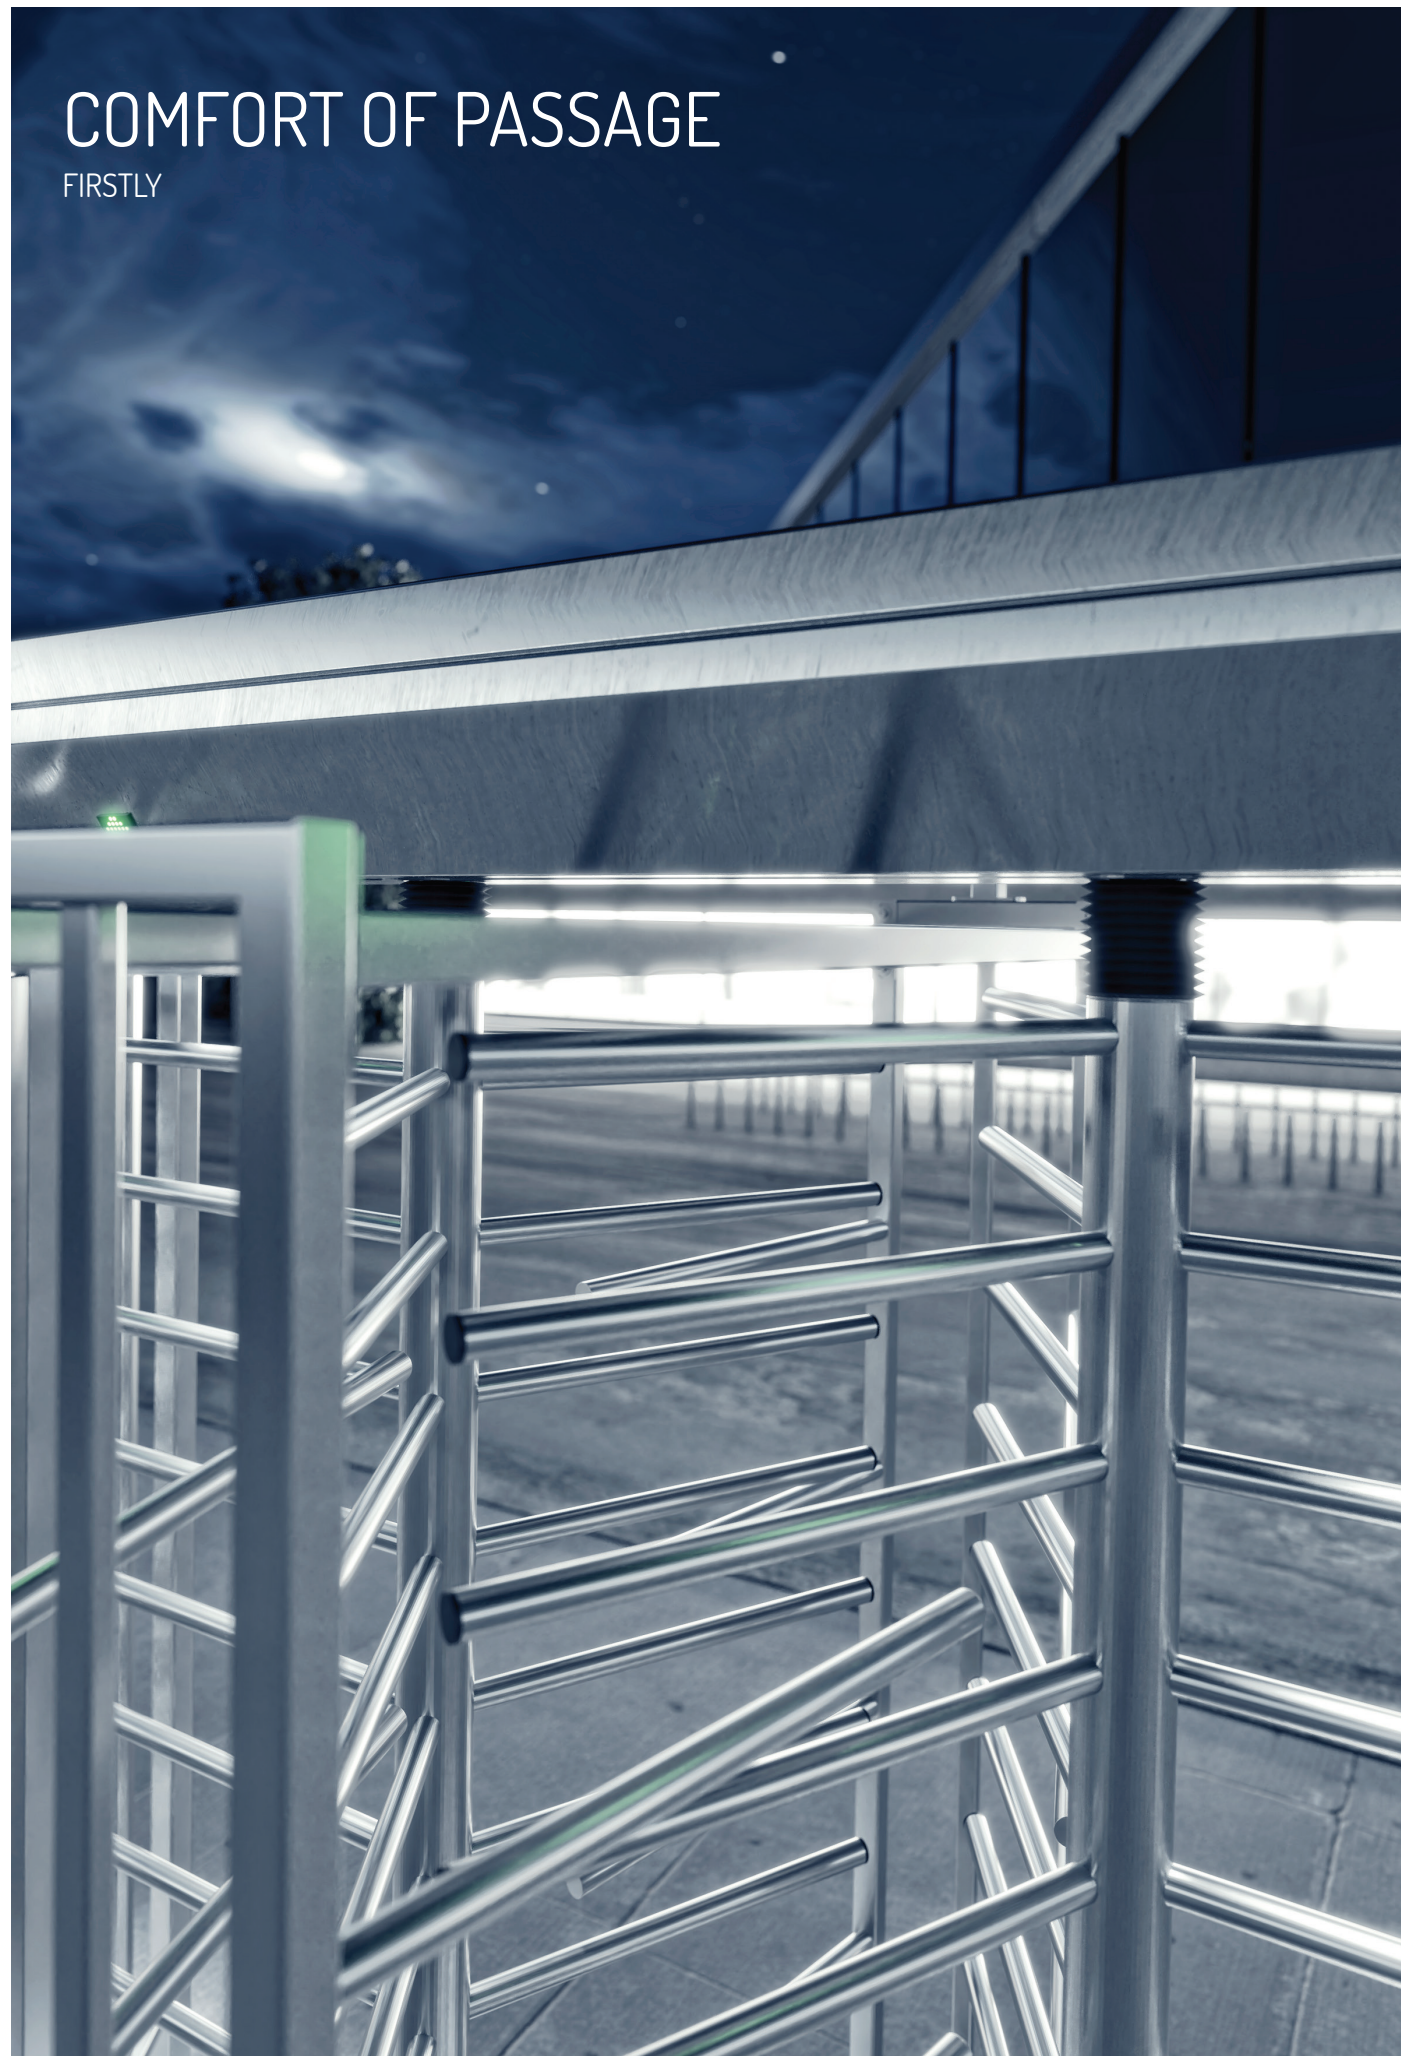

INTUITIVE

CONFIGURATION



DEVICE DESCRIPTION

Double, full height turnstile equipped with two, three section rotors enabling the use of two passages at the same time. The device designed to assist pedestrian access control at guarded passage ways.

Examples of use:


- points of ticket control and access control for passenger traffic,
- airports/seaports,
- passages for authorised personnel, directing passenger traffic,
- points of access control in secured buildings (e.g. state offices such as border crossing points, other services),
- points of ticket control and fees at museums, theatres, cinemas, exhibitions, fair areas, show facilities, paid toilets, points of ticket control at sports facilities, e.g. swimming pools, stadiums, other sports and show facilities,
- access and time attendance control points in working places, e.g. offices, dedicated areas in factories.



VERSATILITY OF USE

SITE-SPECIFIC FOR EACH FACILITY

DEVICE DESCRIPTION

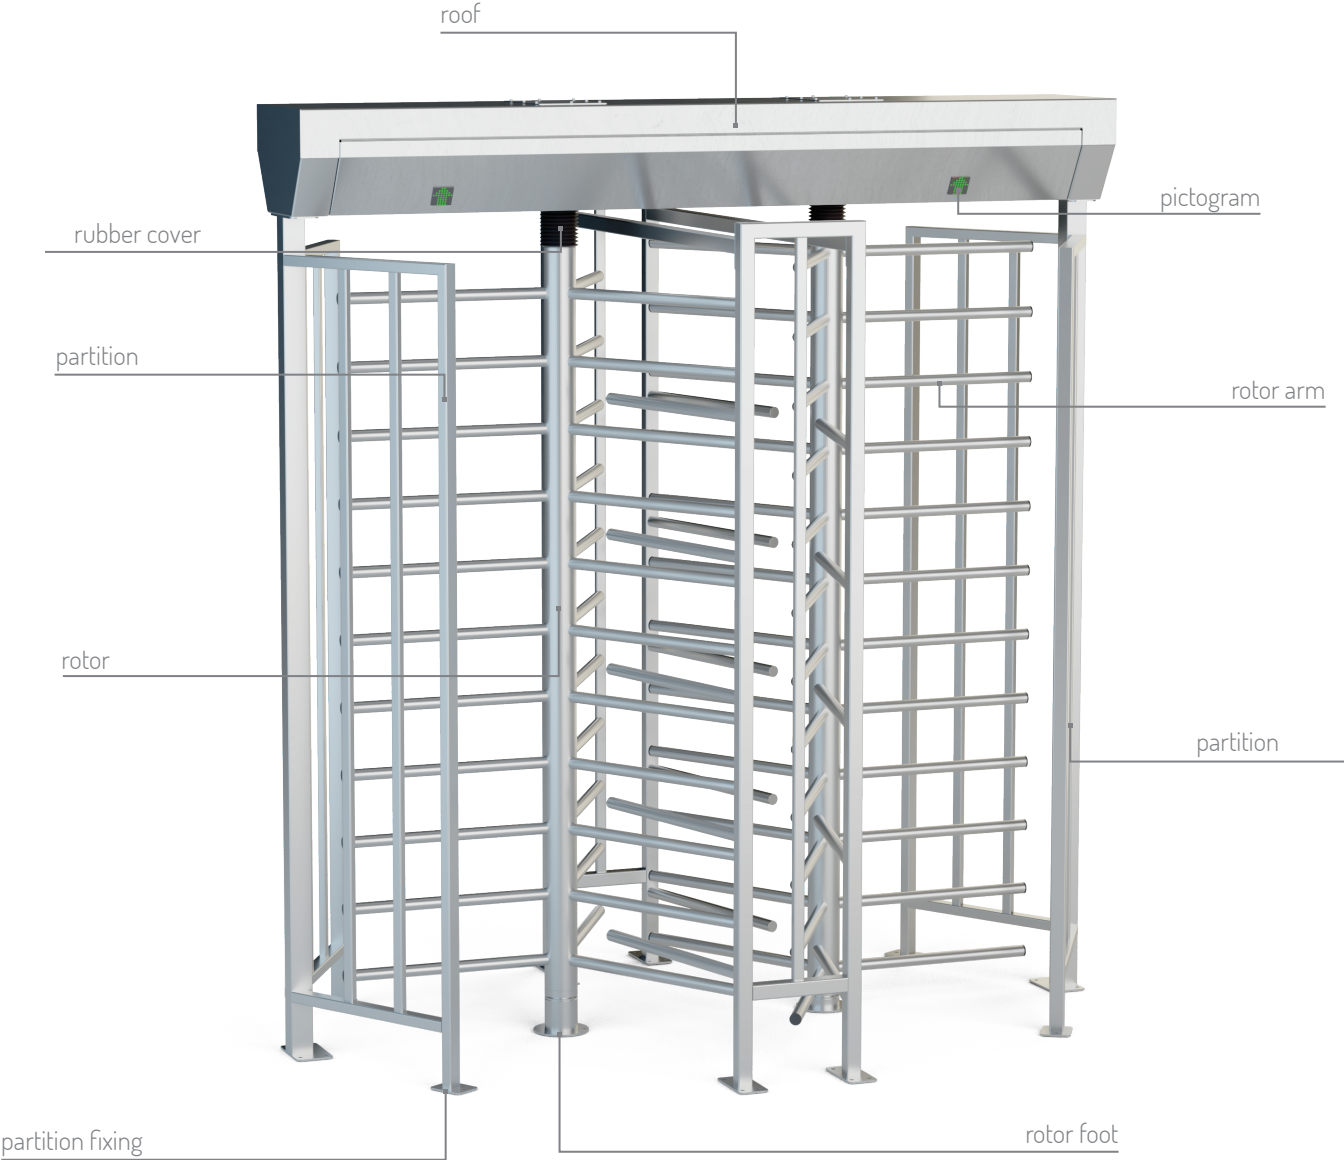

FINISH OPTIONS


„N”	„O”	„M”	„D (duplex)” galvanized + powder coated
<input checked="" type="checkbox"/> Stainless steel- INOX AISI 304	<input type="checkbox"/> Galvanized	<input type="checkbox"/> RAL 9006	<input type="checkbox"/> Galvanized + RAL

RAL COLOR PALETTE EXAMPLES

<input type="checkbox"/> RAL 7016	<input type="checkbox"/> RAL 5010
<input type="checkbox"/> RAL 9003	

- ☒ Standard finish
- ☐ Non-standard colour/non-standard finishing

FUNCTIONS

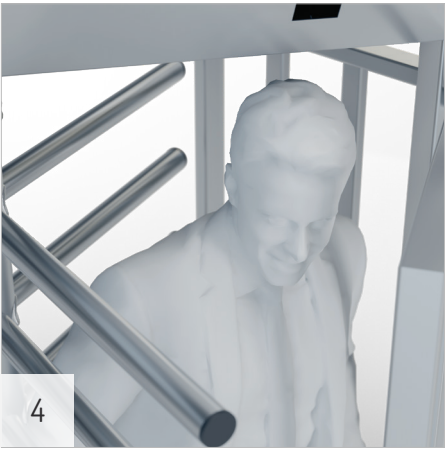


1. NEW CONTROL MODULE

Screen allowing configuration through the program's MENU. Clear MENU gives possibility to change many of the device's parameters.

4. BACKWARD MOTION LOCKING SYSTEM

Locking the backward motion disables the arms rotation in the direction opposite to the one defined by the external controlling device.

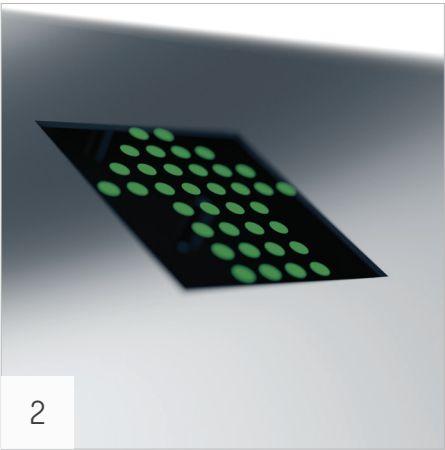

2. LED PICTOGRAMS

Led pictograms show active/inactive traffic directons in the passage. The red color shows the inactive/blocked traffic direction (the device blocks the passage). The green color shows active/unblocked traffic direction.

5. ARM MOTION BOOSTER

The mechanism of the device is equipped with a mechanical system supporting the rotation of the rotor. This system, after applying force to the rotor's arm (thrust), helps rotate the rotor to the starting position.



3. ENTRY AND EXIT CONTROL

The device's mechanism is equipped with a system supporting pedestrian traffic control in both traffic directions (entry/exit from the control zone). In case of pedestrian traffic "collision", the chip remembers external signals received alternately.

TECHNICAL SPECIFICATIONS

MECHANISM GA3

- Blockade system for the rotor.
- Backward motion locking system.
- Auto unlocking in case of power failure.
- Mechanical arm support.
- Anti-collision system.

ELECTRONIC SYSTEM

- Control input (0V signal) for each traffic direction separately
- 1 x feedback signal informing about the rotation of the rotor (NC or NO).
- 1 x input to calibrate the arms' position.
- 1 x input to program the processor.

SPECIFICATIONS

PARAMETER	VALUE
Power supply voltage:	(x2) ~24VAC
Maximum power consumption:	(x2) 90 VA
Minimum power consumption:	(x2) 2 A
Control signal (customizable):	(max. 1 sec)
Feedback signal (customizable):	0V NO/NC
Operating temperature:	-25° to +50° C [-13° to 122°F]
Temperatura przechowywania:	-30° to +60° C [-22° to 140°F]
IP protection rate:	IP 43*
Realive humidity:	10-80%

* there is a possibility of increasing the degree of IP protection at the stage of ordering

It is not possible to manually unlock the mechanism in the event of a power failure.
We recommend installing a reverse coil to automatically unlock the mechanism after a power failure.

DEVICE NAMING SCHEME

Marking description	Series	Number of lanes	Number of rotor wings	Finish type		
				Body	Roof	Rotor
Example	GA3	2	3	N	N	N

Examples of markings:

- GA3-2-3 NNN - GA3 series, number of lanes - 2, number of rotor wings (arms sections) - 3, finish type: stainless rotor, stainless body, stainless roof.

Available finishes:

- N - stainless
- M - powder coated
- O - galvanized
- D (duplex) - galvanized + powder coated


NOTE: Standard finish includes AISI 304 (INOX) stainless steel.



Additional materials and how-to videos available at www.gastopgroup.com

All information given herein is valid at time of publication. GASTOP reserves the right to introduce changes to this offer, concerning both models as well as their construction and equipment. This document does not constitute an offer as understood by law and is published solely for the purpose of information. Optional equipment presented in this brochure may not be available. Product photos and visualizations presented herein may not accurately show technologies in use, properties of materials or colors. Please refer to an authorized distributor or directly to the device manufacturer for detailed information on the above mentioned parameters.

DIMENSIONS

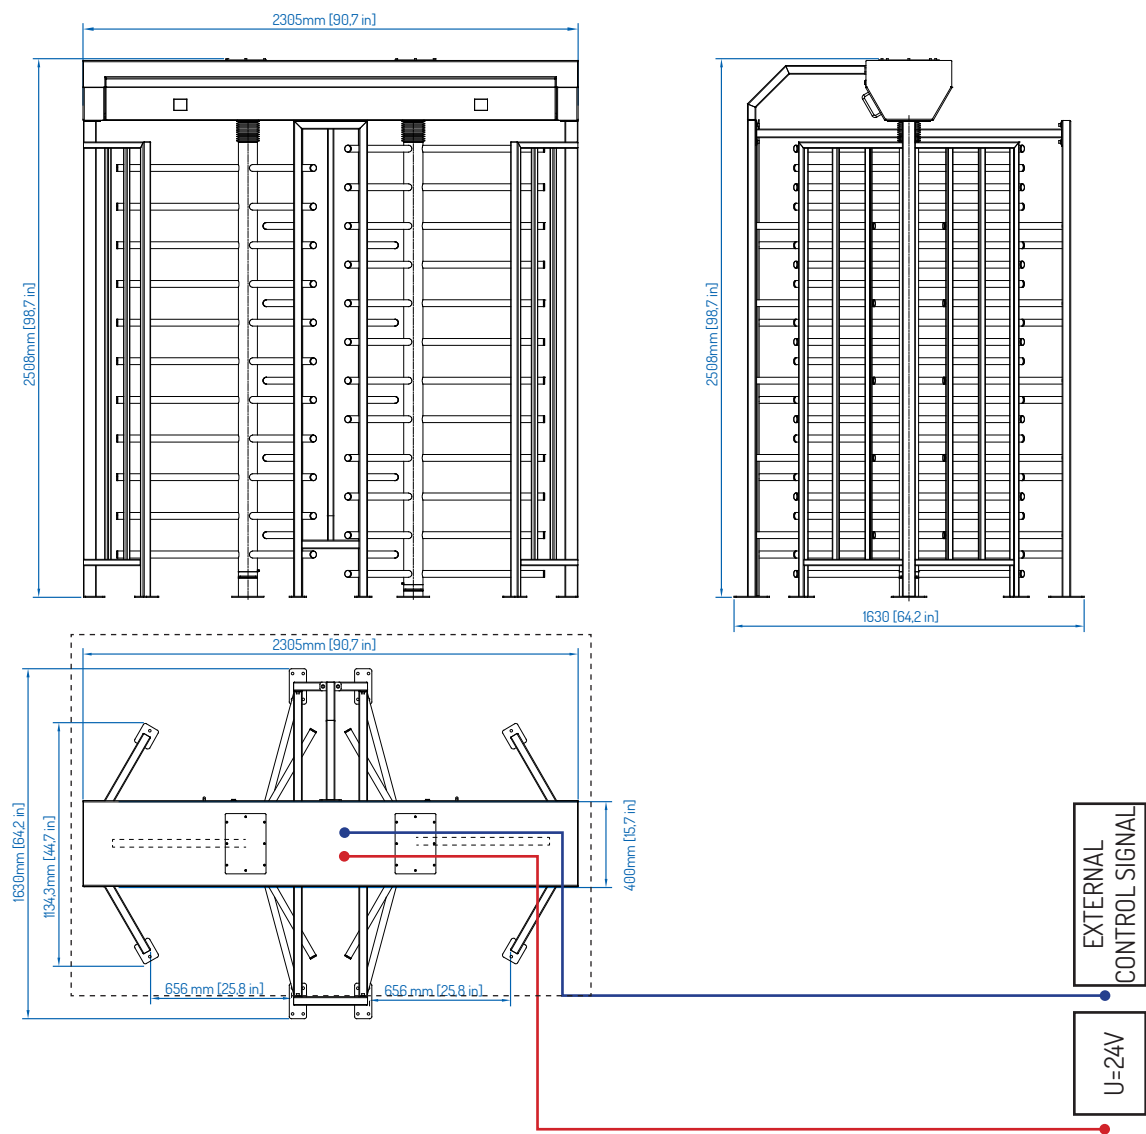

- KEY:
- External control signal - S/UTP cable
 - 24 V supply - ØMY wire 3x1.5mm
 - Foundation

Notes:



EU: GASTOPGROUP.COM
USA: GASTOP.US

Distributor