
# GA2-N2 VERSION 2.0







# Quick and Easy Setup

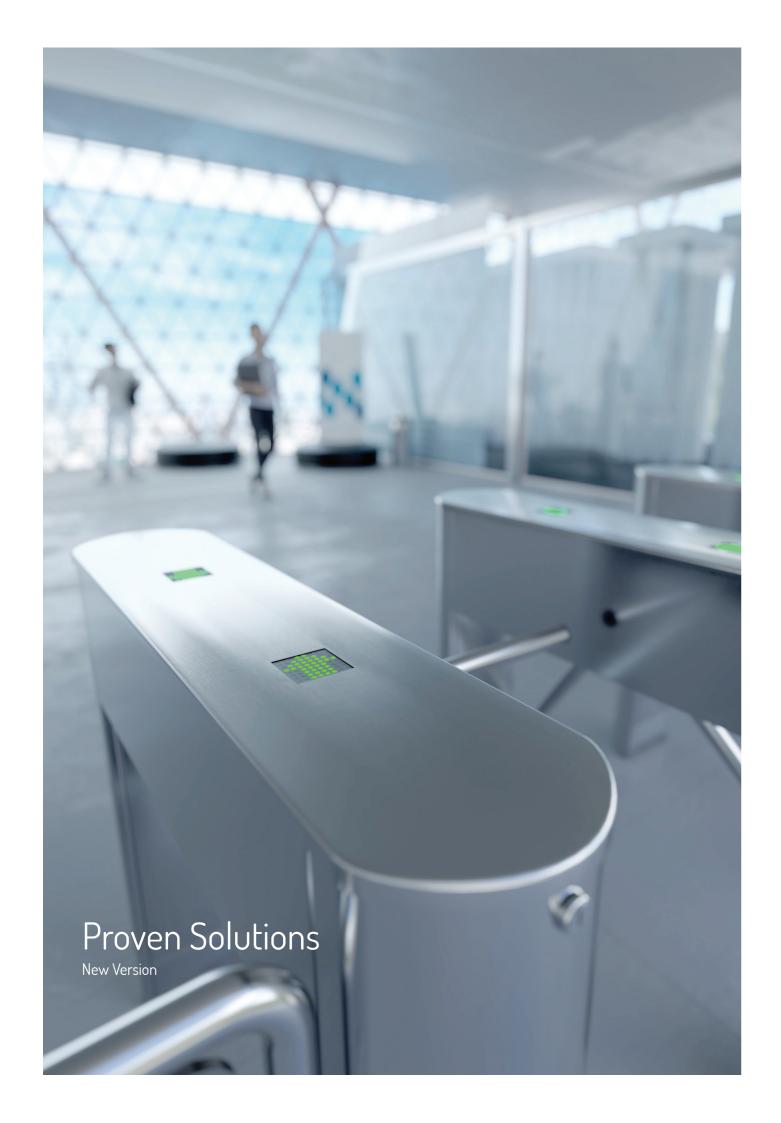




Safety has style too

## DEVICE DESCRIPTION



# FINISH OPTIONS

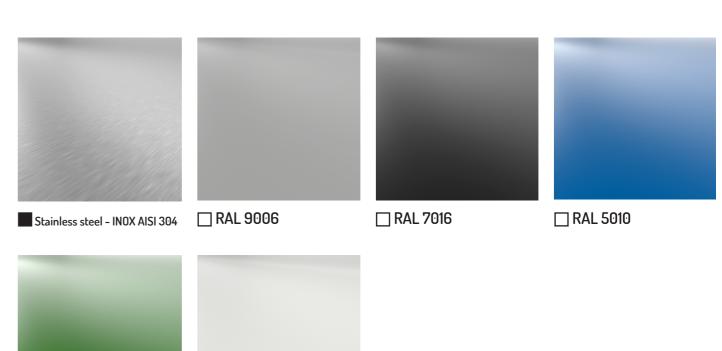

Standard finish


☐ RAL 6002


☐ Non-standard colour/non-standard finishing


☐ RAL 9003

## **FUNCTIONS**














## 1. EASY SETUP

A control panel equipped with a display and a multi-function selector allows easy setup of functions and opearting modes.

## 2. LED PICTOGRAMS

Led pictograms show active/inactive traffic directons in the passage. The red color shows the inactive/blocked traffic direction (the device blocks the passage). The green color shows active/unblocked traffic direction.

## 3. WORK MODES

The device has a number of operating modes, e.g. unior bi- directional traffic control.

## 4. PRECISIE MEASUREMENT SYSTEM

The device is equipped with an electronic rotor position detection system that allows the control unit to precisely control the locking system as well as smoth motion of the arms (available in the model with an electro-mechanical arm movement booster).

## 5. ARM-DROP SYSTEM (OPTIONAL)

Automatic arm-drop system in case of a power failure (this function ia available in models equipped with the arm-drop module).

## **6. ARM MOTION BOOSTER**

The device is equipped with a mechanical arm rotation

## TECHNICAL SPECIFICATIONS

## MECHANISM

Designed for continous operation. Mechanisms allow 1200 cycles per hour.

## MECHANISM [ GA2 ] is also equipped with:

- mechnical arm motion booster
- arm blockade system,
- rotor position detection system,
- a "free exit" system in case of a power failure.

## DEVICE SYMBOL - NON DROP ARM VERSION

Model	Type of finishing
GA2-N2	INOX/RAL

#### DEVICE SYMBOL - DROP ARM VERSION

Model	Type of finishing
GA2-N2-DA	INOX/RAL

- GA2-N2 RAL5010 GA2-N2 turnstile with steel cabinet in RAL5010 black powder coating finish. GA2-N2-DA-INOX - GA2-N2 turnstile with arm-drop function and cabinet finished in AISI304 ground steel



Additional materials and how-to videos available at www.gastopgroup.com

## ELECTRONIC SYSTEM

- Control input (OV signal) for each traffic direction separately
- Feedback signal output (OV signal) to report a passing individual based on an authorization signal,
- Higher priority inputs to deactivate selested passage sections (e.g. from a building management system),
- Top priority input to clear/open a passage section (e.g. from the firefighting system),
- Functions: remembering steering signals during the working cycle, sound signalling, diode signalling, automatic calibration

## **SPECIFICATIONS**

Power supply voltage:	24 V AC
Peak current:	90 W
Minimum power consumption:	3 A
Control signal:	max.1 sec
Feedback signal:	0V
Operating temperature:	-20° to +50° C [-4° to 122°F]
Storage temperature:	-30° to +60° C [-22° to 140°F]
Realive humidity:	10-80%
Operating environment:	inside/outside of buildings
IP protection rate:	IP 40
Net weight:	~60kg [132 lb]

## OPTIONAL EQUIPMENT\*


Name	Description
Power supply	Power supply 230/24V or 110/24V
Control panel	Control panel for manual traffic control


<sup>\*</sup> Optional equipment is not included with the device


All information given herein is valid at time of publication. GASTOP reserves the right to introduce changes to this offer, concerning both models as well as their construction and equipment. This document does not constitute an offer as understood by law and is published solely for the purpose of information. Optional equipment presented in this brochure may not be available. Product photos and visualizations presented herein may not accurately show technologies in use, properties of materials or colors. Please refer to an authorized distributor or directly to the device manufacturer for detailed information on the above mentioned parameters.

All rights reserved Gastop Production Sp. z o.o.

# **DIMENSIONS**

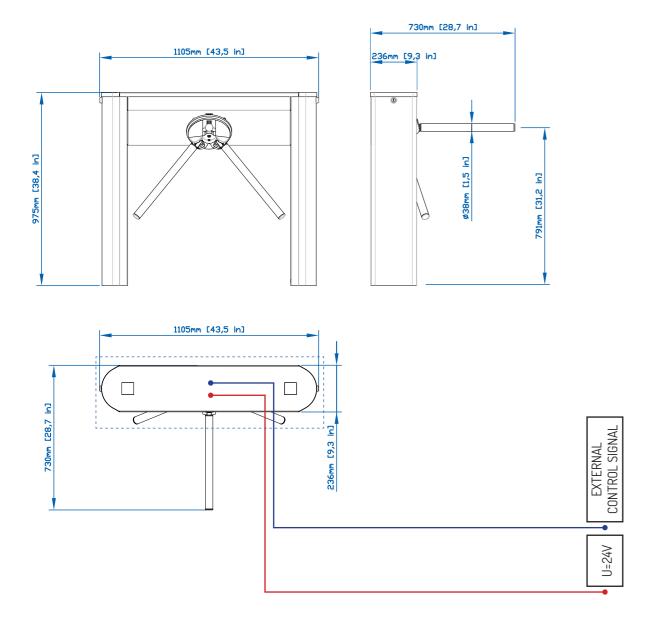







EU: GASTOPGROUP.COM USA: GASTOP.US

Distributor